

ALL DIMENSIONS TO BE CONFIRMED ON SITE
BEFORE ANY WORK COMMENCES.
ALL STEEL WORK TO STRUCTURAL ENGINEER'S
DETAIL AND APPROVAL



UJ ON EMPIRE: NEW COVERED PARKING
BAYS (72 OFF)

NEW WORK
REMOVE EXISTING

- ALL WORK TO APPROVAL
- MAKE GOOD ALL WORK
- CLARIFY ANY UNCERTAINTY
- DIMENSIONS TO BE CHECKED ON SITE

- 1 - INSTALL NEW 75mm X 75mm PAINTED VERTICAL MILD STEEL POST IN CONCRETE HOLES IN POSITION AS SHOWN AS PER SPECIFICATION AND TO APPROVAL
- 2 - INSTALL NEW 50mmX150mm PAINTED HORIZONTAL MILD STEEL C-CHANNEL ON TOP OF VERTICAL POST. REFER: SECTION A-A, DETAIL X AND Y.
- 3 - INSTALL NEW 50mmX75mm PAINTED MILD STEEL C-CHANNEL TO U/SIDE OF ROOF SHEETING IN TO APPROVAL REFER: SECTION AA, AND DETAIL X ND Y.
- 4 - INSTALL NEW 50mmX75mm PAINTED MILD STEEL C-CHANNEL ON TOP OF MILD STEEL C - CHANNEL TO APPROVAL REFER: SECTION AA, AND DETAIL X ND Y.

- GENERAL NOTES:
- ALL STEEL WORK TO BE PRIMED AND PAINTED AS PER MANUFACTURE'S SPECIFICATION AND TO APPROVAL.
 - WIDTH FOR NORMAL PARKING BAY TO BE 2500mm AND 5000mm LONG.
 - WIDTH FOR PWD PARKING BAY TO BE 3500mm AND 5000mm LONG.
 - MAKE PROVISION FOR MARKINGS /SIGNAGE TO PWD PARKING TO APPROVAL.

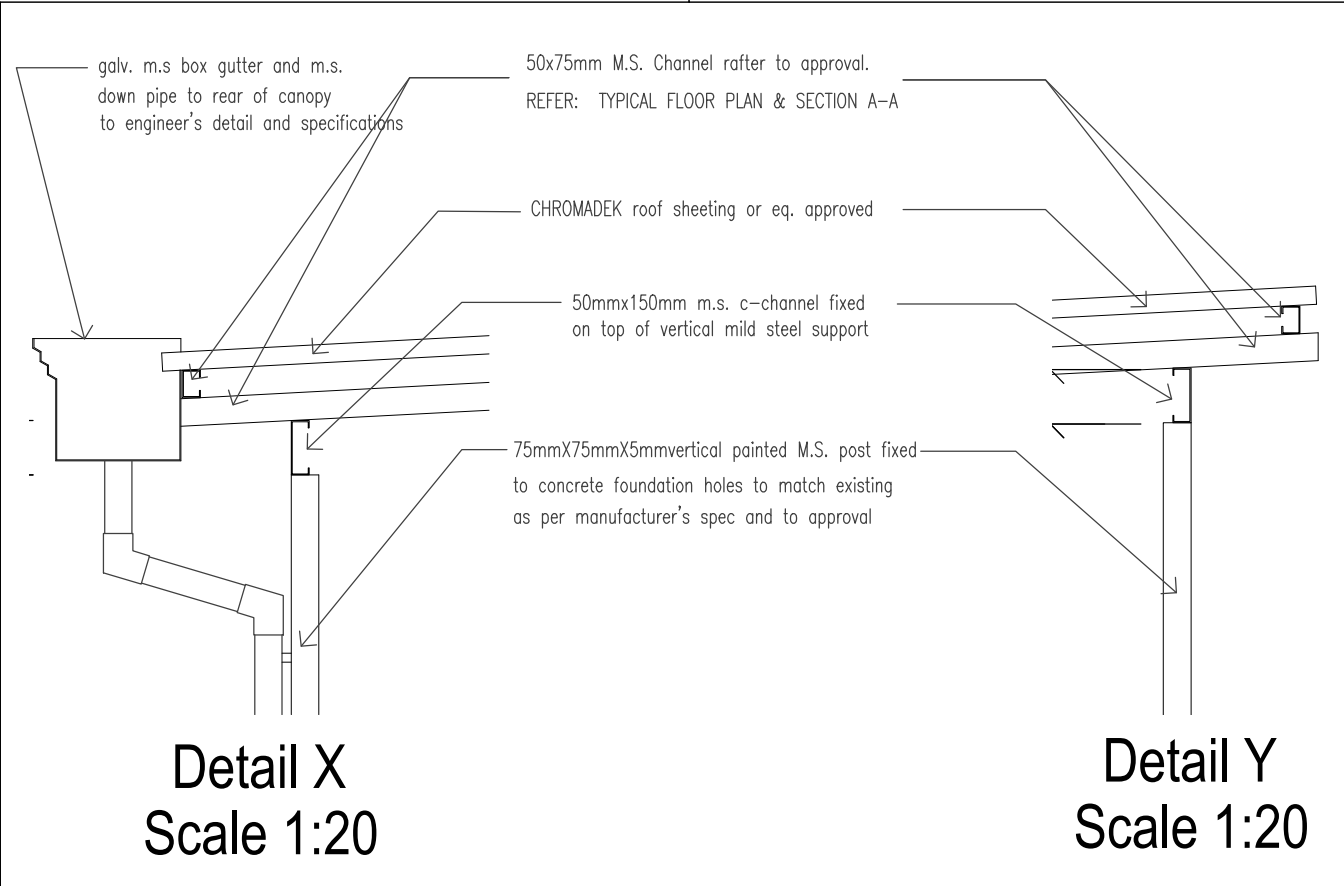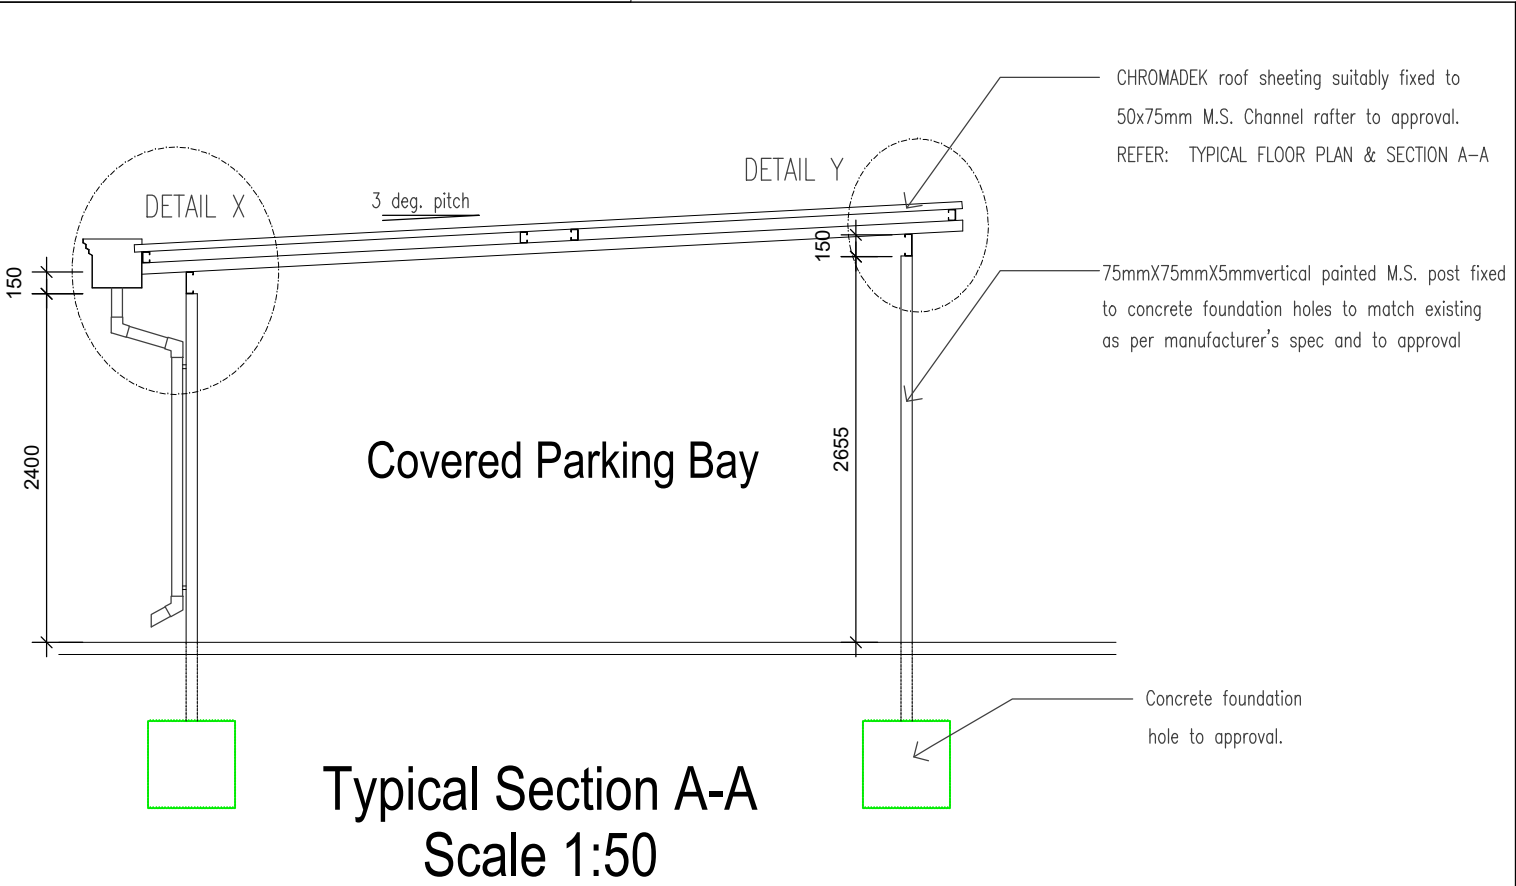

GETEKEN: JM					KAMPUS KODE: UJ: UoE	DATUM: 19/03/2025	<div>UNIVERSITY OF JOHANNESBURG</div> <div>CENTRAL TECHNICAL SERVICES</div> <div>TEL : 559-3019 FAKS : 559-3206</div>	SKAAL: AS SHOWN
GOEDGEKEUR: AC					TITEL:	GEBOU: UJ ON EMPIRE		TEKENING NOMMER: UOE/SPB-2
NAGESIEN: GJ					TYPICAL FLOOR PLAN, SECTION, DETAILS - PROPOSED COVERED PARKING BAYS	VLOER: GROUND		HERSIENING: 1
	HERS	GOEDGEK.	DATUM	BESONDERHEDE				